

isc Silicon PNP Power Transistor

2SB507

DESCRIPTION

- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -60V(\text{Min})$
- Low Collector-Emitter Saturation Voltage-
: $V_{CE(sat)} = -1.0V(\text{Max}) @ I_C = -2.0A$
- Complement to Type 2SD313

APPLICATIONS



- Designed for the output stage of 15W to 25W AF power amplifier.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-3.0	A
I_{CM}	Collector Current-Peak	-6.0	A
P_C	Collector Power Dissipation @ $T_a=25^{\circ}C$	1.75	W
	Collector Power Dissipation @ $T_c=25^{\circ}C$	30	
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.16	$^{\circ}C/W$

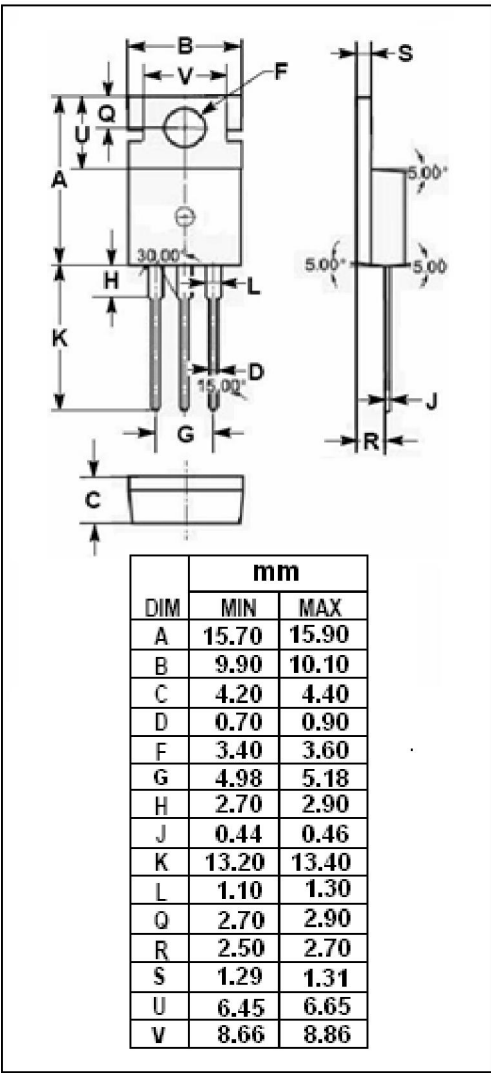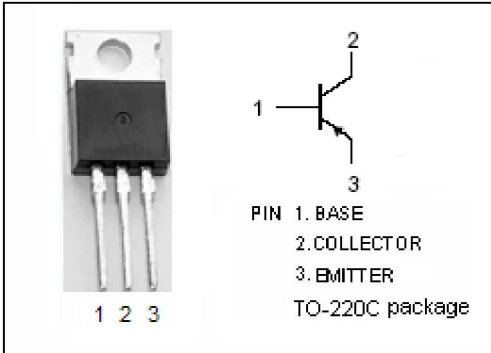

isc Silicon PNP Power Transistor**2SB507****ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -10mA ; I _B = 0	-60			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -2A; I _B = -0.2A			-1.0	V
V _{BE(on)}	Base-Emitter On Voltage	I _C = -1A; V _{CE} = -2V			-1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -20V; I _E = 0			-100	μ A
I _{CEO}	Collector Cutoff Current	V _{CE} = -60V; I _B = 0			-5	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = -4V ; I _C = 0			-1	mA
h _{FE-1}	DC Current Gain	I _C = -1A; V _{CE} = -2V	40		320	
h _{FE-2}	DC Current Gain	I _C = -0.1A ; V _{CE} = -2V	40			
f _T	Current-Gain—Bandwidth Product	I _C = -0.5A; V _{CE} = -5V; f _{test} = 1.0MHz	5.0			MHz

◆ h_{FE-1} Classifications

C	D	E	F
40-80	60-120	100-200	160-320